

ADDENDUM NO. 1
November 28, 2022

TO: PLANS AND SPECIFICATIONS FOR

HEALTH DEPARTMENT DRIVEWAY PROJECT
Project No. 2022-28

Bidders are hereby informed that the construction plans and/or specifications are modified as follows:

PRE BID MEETING MINUTES

The minutes from the pre-bid meeting held on November 22, 2022 are attached and shall be included as part of the bidding documents.

COVER SHEET

The date and time for the bid opening has been corrected and a new sheet is attached.

BID PROPOSAL FORM CHANGES

The following changes have been made to the bid proposal form. **A revised bid proposal is attached.** The Bidder shall use the revised bid proposal form when preparing his bid.

- Bid Item No. 8 and 9: Change from SY units to LF units.
- Bid Item No. 6: Add 10 LF for new total of 395 LF
- Bid Item No. 7: Add 4 SY for new total of 443 SY (for sidewalk replacement)
- Bid Item No. 17: Add 403 SY for new total of 755 SY

ADDITIONS AND CHANGES TO JOB SPECIAL PROVISIONS

The following job special provisions shall be added:

T. 2" BASE ROCK

1.0 Material for 2" base rock shall be Jefferson City Dolomite or equivalent rock formation. The aggregate shall not contain more than 15 percent deleterious rock and shale. The fraction passing the No. 40 sieve shall have a plasticity index not to exceed six. Any sand, silt and clay, and any deleterious rock and shale shall be uniformly distributed throughout the material.

2.0 Gradation for the 2" base rock shall be in accordance with the following gradation requirements:

<u>Sieve</u>	<u>% Passing by Weight</u>
1 1/2"	100
1"	70-90
1/2"	55-75
#8	20-50
#200	0-12

U. FRENCH DRAINS

1.0 Description: This work consists of providing French drain system on the upper and lower sides of the parking lot to minimize the amount of surface water flow to and from the parking lot.

2.0 Requirements: Dimensions and details for construction of the drain system are shown in the plans.

3.0 Material requirements are shown in the plans and shall consist of perforated PVC pipe, washed creek run gavel and filter fabric.

3.0 Method of Measurement: Measurements will be made to the nearest linear foot of installed drain.

4.0 Basis of Payment: Payment will be made on the installed French drain. Excavation and backfill shall be included with the price for the pipe bid items. Replacement of the pavement through the parking lot for the drain system shall be considered incidental to the drain pipe installation and no direct payment will be made.

4.1 All expenses incurred by the contractor by reason of their compliance with this provision shall be considered as completely covered by the unit bid prices for the drain system.

V. RE-GRADING OF MULCHED AREA NORTH AND WEST OF THE PARKING LOT

1.0 Description: This work consists of removing the existing mulch and tree debris material, re-grading the area to a smooth yard like condition followed by seeding and placing an erosion control blanket.

2.0 Requirements: The area to be re-graded and seeded shall extend from the back of curb to the tree line. This area will be clearly marked prior to construction. The approximate area is 403 sy.

2.1 Mulch material shall be removed and hauled from the site and disposed of in a location secured by the contractor.

2.2 The soil surface prior to seeding shall consist of clean topsoil as described in the job special provision M.

3.0 Material: Requirements for the seeding and erosion control blanket are described in job special provision N.

4.0 Method of Measurement. The quantity of erosion control blanket in place will be measured and paid. Additional items necessary for completion of this work are included in lump sum pay items and will not be measured.

5.0 Basis of Payment. All cost incurred by the contractor for labor, equipment and materials in compliance with the above requirements shall be considered completely covered by the unit price for Erosion Control Blanket per lump sum and also the various other items in the project.

Job Special Provision J and K shall be changed to correct the year to 2023 as follows:

J. LIQUIDATED DAMAGES FOR ENTIRE PROJECT COMPLETION DATE

1.0 Description. The Contractor is advised that the entire project must be substantially complete by **May 1, 2023**. The contractor will be allowed to commence work after the notice to proceed is issued.

1.1 Substantial completion is defined as the completion of all pay items with the exception of final seeding and mulch.

1.2 If the project is not substantially complete by **May 1, 2023**, the County Commission, County Health Department and citizens of the county will be damaged in various ways.

2.0 Liquidated Damages for Failure to Complete Work on Time. These costs are not reasonably capable of being computed or quantified. Therefore, the Contractor will be charged with liquidated damages in the amount of **\$500 per calendar day for each full calendar day** that the entire project is not substantially complete after **May 1, 2023**. This deduction will continue until such time as the project is substantially complete.

2.1 Revise Section 108.8.1.2 (a) and (b) and substitute the following for this project:

- (a) Liquidated damages will be assessed from December 15 to March 15.
- (b) Liquidated damages will be assessed for Saturdays, Sundays, and Holidays.

K. LIQUIDATED DAMAGES FOR DRIVEWAY COMPLETION DATE

1.0 Description. The Contractor is advised that the driveway construction shall be completed by **March 14, 2023**.

1.1 Driveway construction completion is defined as the total completion of all pay items necessary to construct the driveway including the rip rap lined ditch. Items not included are final seeding and items related to the drainage work in the parking lot.

1.2 If the driveway construction is not complete as defined above by **March 14, 2023**, the County Commission and County Health Department will be damaged financially. This damage includes the forfeiture of a monetary grant received for this project.

2.0 Liquidated Damages for Failure to Complete Work on Time. These costs are not reasonably capable of being computed or quantified. Therefore, the Contractor will be charged with liquidated damages in the amount of **\$5,000 per calendar day for each full calendar day** that the driveway construction is not complete as defined above by **March 14, 2023**. This deduction will continue until such time as the driveway construction is complete.

2.2 Revise Section 108.8.1.2 (a) and (b) and substitute the following for this project:

- (c) Liquidated damages will be assessed from December 15 to March 15.
- (d) Liquidated damages will be assessed for Saturdays, Sundays, and Holidays.

Job Special Provision N. Lawn Restoration shall be changed as follows:

N. LAWN RESTORATION

1.0 Description. Final grade shall be established and seeded, fertilized and mulched or sodded as shown in the plans and defined in the specifications.

1.1 All disturbed areas of the project not paved or concrete shall be seeded or sodded as noted on the plans.

2.0 Seeding. The seed mixture shall be Turf Type Tall Fescue, sourced locally and commonly referred to as Triple T. The seeding rate shall be 350 lbs/acre (0.72 lb/sy).

2.0.1 For the re-graded mulch area north and west of the parking lot, seeding shall be applied prior to placement of the erosion control blanket and after placement. This will result in a rate of double the amount stated in 2.0 above.

2.1 Fertilizer shall be a standard commercial product which, when applied at the proper rates shall supply the quantity of total nitrogen (N), available phosphoric acid (P₂O₅) and soluble potash (K₂O) to provide a final mixture of 13-13-13. The rate of application shall be 500 pounds per acre of 13-13-13 fertilizer. Material may be accepted on the basis of bag label analysis or supplier's certification, or on the basis of samples tested in the laboratory. For samples tested in the laboratory, tolerances in the nominal composition as shown by label or certification of 10 percent up to the maximum of two units (2% plant food) for the individual constituents, and minus 3 percent for the sum of the constituents, will be permitted. There is no limit on the plus tolerances for such samples.

2.2 Type 1 Mulch (Vegetative) shall be applied at the rate of 1 ½ tons per acres.


2.2.1 A erosion control blanket shall be installed in the area north and west of the parking lot after mulch removal and re-grading. The material type for the blanket shall be a North American Green S150 or equivalent.

4.0 Method of Measurement. The contractor shall restore all disturbed areas as noted on the plans. A measurement will not be made. The contractor can control the extents of their restoration efforts based on their ability to minimize lawn disturbance.

5.0 Basis of Payment. All cost incurred by the contractor for labor, equipment and materials in compliance with the above requirements including seedbed preparation, liming, furnishing and placing fertilizer and mulch, shall be considered completely covered by the unit price for Lawn Restoration, per lump sum and Erosion Control Blanket per SY.

PLAN SHEET CHANGES

Sheet C2.01 has been revised with the addition of notes as follows:

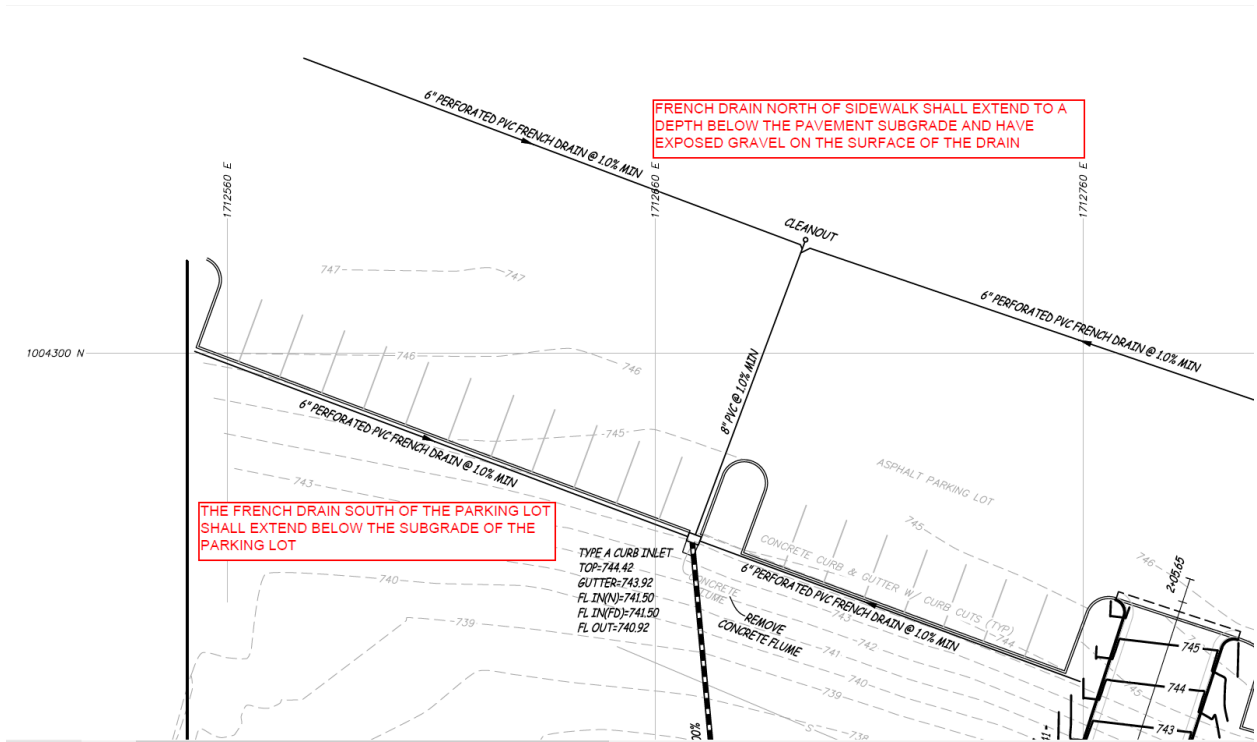


THE FRENCH DRAIN SOUTH OF THE PARKING LOT SHALL EXTEND BELOW THE SUBGRADE OF THE PARKING LOT

FRENCH DRAIN NORTH OF SIDEWALK SHALL EXTEND TO A DEPTH BELOW THE PAVEMENT SUBGRADE AND HAVE EXPOSED GRAVEL ON THE SURFACE OF THE DRAIN

Sheet C2.01 has been revised with the addition of details showing the extents for the re-grading of the mulched area north and west of the parking lot:



The following detail shall be added to Detail Sheet C4.02:

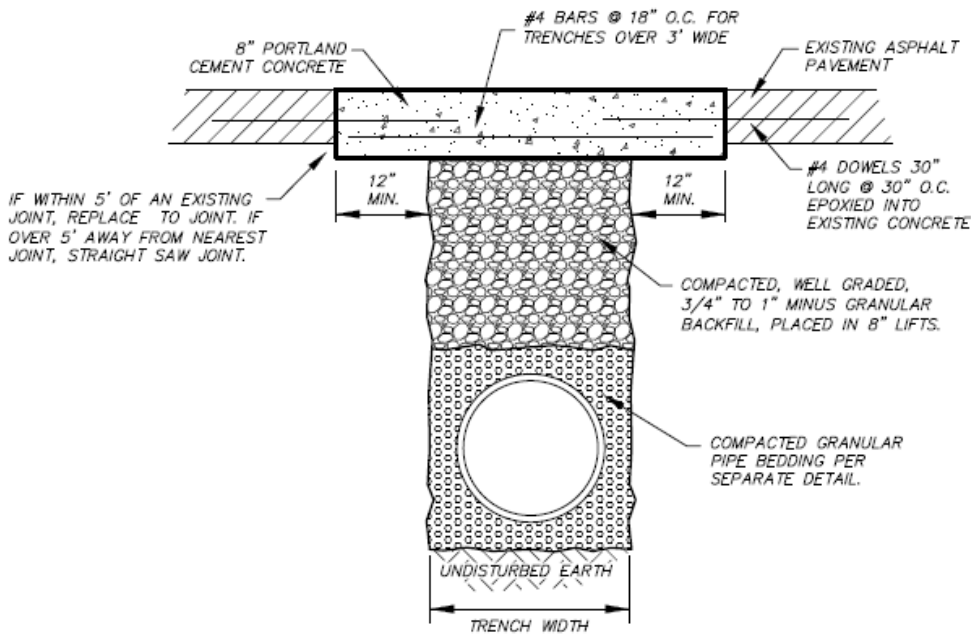

EXISTING ASPHALT PAVEMENT

NOTES:

1. CONCRETE SHALL BE 4,000 PSI WITH 6% AIR.
2. REINFORCEMENT SHALL BE GRADE 60.
3. A MINIMUM OF 5' OF CONCRETE CURB AND GUTTER SHALL BE REPLACED. WHERE THE REPAIR WILL BE WITHIN 5' OF A JOINT, REPLACE CONCRETE CURB AND GUTTER TO THE JOINT. NO SECTION OF CONCRETE CURB AND GUTTER SHALL BE LESS THAN 5' LONG.
4. CLEAN GRANULAR MATERIAL IS NOT SUITABLE TRENCH BACKFILL.

TRENCH PATCHING WITHIN PAVED AREAS

NOT TO SCALE

BY THE ORDER OF:

Eric Landwehr, P.E., Director
 Cole County Department of Public Works
 November 28, 2022

**Health Department Driveway Project
Project No. 2022-28**

**Pre-Bid Meeting Minutes
November 22, 2022**

The meeting was started at 10:00 AM in the conference room located in the office of the Cole County Health Department. Eric Landwehr and Chris Yarnell discussed the following items:

Attendees:

<u>Name</u>	<u>Firm</u>	<u>Phone</u>	<u>FAX</u>
Eric Landwehr	CCPW	(573) 636-3614	(573) 636-8389
Brent Cain	CCPW	(573) 636-3614	(573) 636-8389
Greg Camp	Cole County	(573) 694-2884	
Chris Yarnell	ES&S	(573) 636-3303	
Heather Masters	MMLC	(573) 680-1193	
Calvin Broughton	GWH LLC	(573) 619-5234	

GENERAL BIDDING INFORMATION

1. Sealed proposals on the forms prepared by Cole County will be received by the County Commission, Cole County, Missouri, at the Courthouse Annex, Room 200, Jefferson City, Missouri, until **3:00 p.m., on Wednesday November 30, 2022**, for the **Health Department Driveway Project**. The proposals will be publicly opened and read aloud thereafter. Bids received after the specified time for opening will be returned unopened.
2. Prior to the time and date designated for the receipt of bids, bids may be modified or withdrawn only by notice to the County Commission at the place and prior to the time designated for receipt of bids. No bids shall be withdrawn for a period of 90 calendar days after the scheduled closing time for receipt of bids.
3. Plans and specifications may be viewed and downloaded online in the bids section at www.colecounty.org. A hard copy of the specifications will not be provided but a hard copy of the plans will be provided upon request in advance.
4. **All contractors wishing to bid on this project shall submit the plan holder contact information form found in the specifications to jbryant@colecounty.org prior to the bid opening.** A bid received from a contractor that has not submitted this form will not be opened and therefore not read. It will be returned to the contractor.
5. A bid bond will be required in the amount of 5% of the bid. No personal checks will be accepted.
6. A one-year Performance, Payment and Guarantee Bond is required.
7. Questions regarding the plans and specifications will be taken up to 24 hours prior to the date and time of the bid opening. This will allow the County to get the information out to all of the bidders. General questions regarding the bidding process will be answered up to the time of the opening.

Health Department Driveway

Pre-Bid Minutes

Page 2

8. Addenda may be issued on this project at any time up to 24 hours prior to the bid date and time. It shall be the responsibility of the contractor to verify if any addenda have been issued prior to submitting their bid. The County assumes no liability if a contractor fails to incorporate addenda into their bid. **Addenda will be posted on the website and will NOT be faxed.**
9. Prevailing wage rates are required on this project. The wage rates for Cole County are included in the specifications.
10. The right is reserved by Cole County to reject any and all bids and to waive informalities therein.
11. Bids shall be submitted on the Proposal Form furnished by the County. All blank spaces shall be filled in on the forms by typewriter or by handwriting in ink. The bidder shall make no other stipulations in the bid form or qualify his bid in any manner. The bids shall be submitted in an opaque sealed envelope marked "**Health Department Driveway Project – Project No. 2022-28, Construction Bid**" and shall be clearly marked with the bid date, bid time and bidder's name and address.
12. The County will accept computer generated spread sheets for the unit price items to help alleviate problems with computation mistakes. If a spread sheet is used, it shall be in the same format as the one included in the proposal. The sheet shall be inserted in front of the one included in the proposal form.
13. If awarded the contract, the Contractor agrees to complete the work by no later than **May 1, 2023** for the entire project and **March 14, 2023** for the driveway construction portion of the project as detailed in the specifications. See below for further discussion.
14. **Liquidated damages** shall be **\$500.00** per day for the **May 1, 2023** completion date provision and **\$5,000.00** per day for the **March 14, 2023** completion date provision. See below for further discussion.
15. Simultaneously with the delivery of the executed contract, the Contractor shall furnish a surety bond in the amount of 100% of the total contract sum, as security for both faithful performance of the contract and for the payment of all persons performing labor on the project under this contract as specified in the contract documents.
16. Do NOT include federal excise tax or sales and use taxes in the bid prices. This project will be a SALES TAX EXEPMT project. A copy of the federal tax exemption certificate will be furnished.

The following items were discussed by Eric Landwehr regarding the plans and specifications:

GENERAL PROJECT INFORMATION

1. The Health Department secured a grant to pay for the majority of this project. Invoices

Health Department Driveway

Pre-Bid Minutes

Page 3

- have to be submitted by March 15th for reimbursement. Liquidated damages for the driveway completion are high due to this deadline.
2. Given the tight timeframe and winter working conditions, the contractor may want to consider using fill materials that can be compacted regardless of weather conditions such as shot rock fill.
 3. The grant secured by the Health Department for the driveway is approximately \$120,000. This amount has to be invoiced prior to March 15th to receive full reimbursement. **If we achieve full reimbursement of the grant amount prior to the March 14th completion date, we can negotiate an extension of that particular completion date to minimize the potential for the contractor to face a \$5,000 penalty.**
 4. The County or Engineering Consultant will be providing construction observation.
 5. The CONTRACTOR shall provide all construction staking for the project.
 6. ALL CHANGE ORDERS – If there is any item that the contractor thinks additional pay is warranted, a change order request will have to be submitted and approved prior to commencing any of the additional work. Any extra work done without approval is not guaranteed to be paid.
 7. Earthwork is unclassified and is to be paid by lump sum. If there is rock encountered, a price for rock excavation will be negotiated.
 8. Traffic Control shall be in accordance with MUTCD standards when working in or near the lanes of West Truman Blvd.
 9. Edge drain work is to be done in the parking lot area to eliminate some issues with excess surface water drainage. Locations are shown in the plans.
 10. Erosion control shall be provided and paid per lump sum. Silt fence, inlet protection and concrete washout area is shown on sheet C3.01.

UTILITIES

Energy Transfer has two gas pipelines running diagonal through the project area. They will be sending a crew to reinforce their lines under the new driveway and plan to do that in middle December. The contractor shall coordinate their work with Energy Transfer and take special care with working around their lines. The contractor shall notify Energy Transfer when they will be working within their easement.

GENERAL SPECIFICATIONS

1. Section 109.9.1 describes the requirements for release of the 5% retainage. These requirements must be met before final payment is made.

TECHNICAL SPECIFICATIONS AND STANDARD PLANS

Technical specifications for this project will be the latest effective version of the Missouri Standard Specifications for Highway Construction.

Standard Drawings shall be the latest effective version of the City of Jefferson Standard

Drawings.

JOB SPECIAL PROVISIONS

1. The provisions of this section take precedence over any other provisions in the specifications. Please read this section as project specific requirements are detailed.
2. E. Earthwork – Earthwork will be paid per lump sum. The typical earthwork items are listed but not limited to what is shown in this JSP. We do not expect to encounter any rock during excavations but if we do a price for rock excavation will be negotiated as a change order item. Backfill material for the curb and gutter shall be good clean top soil.
3. J. Liquidated Damages for Entire Project Completion Date – The whole project shall be completed by May 1, 2023. Damages will be \$500 per day.
4. K. Liquidated Damages for Driveway Completion Date – The driveway shall be completed by March 14, 2023. Damages will be \$5,000 per day. Work items shall include all items necessary to construct the driveway including the rip rap lined ditch. Items not include are final seeding and items related to the drainage work in the parking lot. **Please read the GENERAL PROJECT INFORMATION section above for discussion about possible relaxing of this March 14th provision if full reimbursement of the grant is achieved. If any extension is done on Provision K, it would not change the final completion date of May 1st.**
5. J. Removal of Improvements – A listing of removals is shown but there may be additional items necessary to remove that are not on this list. These shall be considered completely covered by the bid item with no additional payment warranted.
6. M. Erosion Control – All erosion control items are listed here with specific information about each. Note that silt fence shall be installed correctly. Incorrect silt fence will not be paid for. Straw wattles can be used in lieu of silt fence.
7. M. Top Soil in Areas to be Seeded or Sodded – The top 6 inches of all disturbed areas shall be good clean topsoil. This will require rock removal when necessary. All areas for seeding shall be inspected prior to placing seed.
8. S. Lawn Restoration – Specifications for seeding, fertilizer and mulch is shown there. No sod will be required.
9. P. Workzone Traffic Management Plan – The contractor shall provide a plan for addressing traffic control when working in or near the lanes of W. Truman Blvd. This plan shall be submitted two weeks prior to beginning work. The road shall remain open at all times. The contractor must coordinate with Health Department personnel when working in or around the parking lot.
10. R. Permits – There is a MoDNR Land Disturbance permit and SWPPP for this project that the contractor shall follow. It is included in the bid documents.

PLANS

1. On Sheet C4.01, the Rip-Rap detail calls out a Curlex high velocity erosion control blanket. This is incorrect. It should be a standard MoDOT fabric for rock blanket such as a Mirafi 180N.
2. Sheet C4.01 shows the pavement structure consisting of 6" of 2" base rock, 4" of 1" base

**Health Department Driveway
Pre-Bid Minutes
Page 5**

rock and 6" of PCCP.

3. Sheet C4.01 shows a detail for the French drain system. The trench shall be lined with filter fabric. Clean brown creek run gravel shall be used.
4. The plan sheets showing the drive way connection to W. Truman Boulevard. This road was recently overlaid and the contractor shall take extra care to not damage the pavement. It is highly suggested that the curb be left in place until it is necessary to remove for placement of the new concrete approach. Damage done to the pavement will be highly disappointing and the contractor will not want this to happen. Repair will require the contractor to patch using heating equipment to blend in the new material with the old.

QUESTIONS AND ANSWERS DURING THE MEETING

Q1. Is there a traffic control sheet for W. Truman?

A1. NO. The contractor shall submit a plan prior to beginning work. It will mostly consist of two types of work zones, one would be work along the shoulder and the other would be a lane drop which will be necessary when pouring the approach.

Q2. Is the contractor required to have the gas company around when excavating?

A2. MAYBE. The contractor shall notify them prior to beginning work. They may or may not be present every day but the at least need to be notified.

Q3. You said the gas company is going to reinforce their lines. What are they going to do?

A3. YES. They are going to reinforce their line under the new driveway. We are not sure what they will consist of but likely check welds and re-welding.

ESL:el

CC: File
Attendees
Planholders

COUNTY OF COLE - MISSOURI



REQUEST FOR BID

PROJECT NO. 2022-28 HEALTH DEPARTMENT DRIVEWAY PROJECT

SUBMISSIONS SHALL BE ACCEPTED UNTIL

Wednesday, November 30 at 3:00 p.m. CENTRAL

AND RECEIVED AT:

**COLE COUNTY COMMISSION
311 EAST HIGH STREET, ROOM 200
JEFFERSON CITY, MO 65101**

Company Name

Direct Contact Name (Typed/Printed)

Corporate Address

Title

Local Address

Email

Office Telephone Number

Direct Line or Extension

I hereby certify that I am submitting the following information on behalf of the above-listed company and understand that by virtue of executing and returning with this response this REQUIRED RESPONSE FORM, I further certify full, complete and unconditional acceptance of the terms and conditions of this invitation, all attachments and the contents of any addendum released hereto. (Submission must be signed by an officer or employee having authority to legally bind the respondent.)

Authorized Signature

Authorized Name (Typed/Printed)

Title

Date

PROPOSAL FORM

COUNTY OF COLE, MISSOURI

**COLE COUNTY HEALTH DEPARTMENT DRIVEWAY PROJECT
PROJECT NO. 2022-28**

Name of Bidder: _____

Address of Bidder: _____

To: Cole County Commission
Attn: Purchasing Agent
311 E. High Street Room 200
Jefferson City, MO 65101

THE UNDERSIGNED BIDDER, having examined the Plans, Specifications, Regulations of the Contract, Special Conditions and other proposed Contract Documents, and all addenda thereto; and being acquainted with and fully understanding (a) the extent and character of the work covered by this Proposal; (b) the location, arrangement, and specified requirements for the proposed work; (c) the location, character, and condition of existing streets, roads, highways, railroads, pavement, surfacing, walks, driveways, curbs, gutters, trees, sewers, utilities, drainage courses and structures, and other installation, both surface and underground which may affect or be affected by the proposed work; (d) the nature and extent of the excavations to be made, and the type, character, and general condition of materials to be excavated; (e) the necessary handling and re-handling of excavated materials; (f) the location and extent of necessary or probable dewatering requirements; (g) storm and flood water; (h) local conditions relative to labor, transportation, hauling, and rail delivery facilities; and (i) all other factors and conditions affecting or which may be affected by the work.

HEREBY PROPOSED to furnish all required materials, supplies, equipment, tools, and plant; to perform all necessary labor and supervision; and to construct, install, erect, and complete all work stipulated in, required by, and in accordance with the proposed Contract Documents and the drawings, Specifications, and other documents referred to therein (as altered, amended, or modified by addenda), in the manner and time prescribed and that he will accept in full payment sums determined by applying to the quantities of the following items, the following unit prices and/or any lump sum payments provided, plus or minus any special payments and adjustments provided in the Specifications and he understands that the estimated quantities herein given are not guaranteed to be the exact or total quantities required for the completion of the work shown on the drawings and described in the Specifications, and that increases or decreases may be made over or under the Contract estimated quantities to provide for needs that are determined during progress of the work and that prices bid shall apply to such increased or decreased quantities as follows:

**COLE COUNTY HEALTH DEPARTMENT DRIVEWAY PROJECT
PROJECT NO. 2022-28**

Item No.	Item Description	Unit	Quantity	\$ Unit Price	\$ Amount
1	Removal of Improvements	LS	1		
2	Mobilization	LS	1		
3	Earthwork and Grading	LS	1		
4	2" Base Rock (6" Thick)	SY	721		
5	Type 1 Aggregate Base (4" Thick)	SY	721		
6	Type A Curb and Gutter	LF	395		
7	6" Concrete Pavement	SY	443		
8	6" Perforated Drain Pipe with Geotextile Sock	LF	488		
9	8" Perforated Drain Pipe with Geotextile Sock	LF	75		
10	12" Pipe Cleanout	EA	1		
11	12" HDPE Pipe	LF	110		
12	54" Reinforced Concrete Pipe	LF	50		
13	54" RCP Flared End Section	EA	1		
14	Type A Curb Inlet	EA	1		
15	Type M Curb Inlet	EA	1		
16	Rip Rap	SY	110		
17	Erosion Control Blanket	SY	755		
18	Traffic Control	LS	1		
19	Lawn Restoration	LS	1		
20	Erosion Control	LS	1		
TOTAL:					

BIDDER recognizes and acknowledges the receipt of the following Addenda:

DATE Addendum Number DATE Addendum Number

If the Bidder intends to use any subcontractor in the course of the construction, he shall list them. (If necessary, attach additional pages to list all subcontractors.)

Company Name	Address	City, State, Zip	Work To Be Performed	% of Bid

TIME OF COMPLETION:

The undersigned hereby agrees to complete the driveway construction by **March 14, 2023** and the entire project by no later than **May 1, 2023**, subject to the stipulations of the regulations of the Contract and the Special Provisions.

It is understood that the specifications governing the construction of the work contemplated are those known and designated as the "Missouri Highway & Transportation Commission Standard Specifications for Highway Construction" approved by the Missouri Highways & Transportation Commission, together with the special provisions, job and general, if any attached to this proposal.

It is understood and agreed that if this Proposal is accepted, the prices quoted above include all applicable state taxes and that said taxes shall be paid by the Contractor.

The undersigned, as Bidder, hereby declares that the only persons or firms interested in the Proposal as principal or principals is or are named herein and that no other persons or firms than herein mentioned have any interest in this Proposal or in the Contract to be entered into; and this Proposal is made without connection with any other person, company, or parties making a bid or proposal; and that it is in all respects fair and in good faith, without collusion or fraud.

The undersigned agrees that the accompanying bid deposit shall become the property of the County should he fail or refuse to execute the Contract or furnish Bond as called for in the specifications within the time provided.

If written notice of the acceptance of this bid is mailed, telegraphed, or delivered to the undersigned within ninety (90) days after the date of opening of bids, or any time thereafter before this bid is withdrawn, the undersigned will, within ten (10) days after the date of such mailing, telegraphing, or delivering of such notice, execute and deliver a Contract in the form of Contract attached.

The undersigned hereby designates as his office to which such notice of acceptance may be mailed, telegraphed, or delivered:

Contact Person	Company Name	Mailing Address	City, State & Zip Code
----------------	--------------	-----------------	------------------------

It is understood and agreed that this bid may be withdrawn at any time prior to the scheduled time for the opening of bids or any authorized postponement thereof.

Attached hereto is a Bid Bond for the sum of _____

_____ (\$ _____)
 Dollars (cashier's check), made payable to the County of COLE.

SIGNATURE AND IDENTITY OF BIDDER

The undersigned states that the correct LEGAL NAME and ADDRESS of (1) the individual bidder, (2) each partner or joint venturer (whether individuals or corporation, and whether doing business under a fictitious name), or (3) the corporation (with the state in which it is incorporated) are shown below; and that (if not signing with the intention of binding himself to become the responsible and sole contractor) he is the agent of, and duly authorized in writing to sign for the Bidder or Bidders; and that he is signing and executing this (as indicated in the proper spaces below) as the proposal of

AN INDIVIDUAL:

 Name of Individual

 Residence Street Address

 Social Security Number

 City, State & Zip Code

 Firm Name, If Any

 Business Address

 Business Telephone Number

 City, State & Zip Code

 Signature

 Date

A PARTNERSHIP:

Name of Partnership (State Names & Addresses of All Partners)

Partner Residence Address

Partner Residence Address

Business Address

City, State & Zip Code Business Telephone Number

Signature of At Least One Partner Date

A CORPORATION:

Name of Corporation Incorporated under the laws of the State of _____

Name and Title of Officer Corporate License No. _____
(If a corporation organized in state other than Missouri, attach Certificate of _____
Authority to do business in the State of Missouri.)

Business Telephone Number

Business Address City, State & Zip Code

Signature of Officer Date

ATTEST:

Signature of Secretary (SEAL) Date

ANTI-COLLUSION STATEMENT

STATE OF _____)
)
)
COUNTY OF _____)

being first duly sworn, deposes and says that he is

_____ of _____
Title of Person Signing Name of Bidder

Address of Bidder

that all statements made and facts set out in the proposal for the above project are true and correct; and that the bidder (The person, firm, association, or corporation making said bid) has not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of free competitive bidding in connection with such bid of any contract which result from its acceptance.

Affiant further certifies that bidder is not financially interested in, or financially affiliated with, any other bidder for the above project.

(BY) _____

(BY) _____

Sworn to before me this _____ day of _____, 20_____

Notary Public

My commission expires: _____

CONTRACTOR'S AFFIDAVIT

STATE OF _____)
)
)
COUNTY OF _____)

This affidavit is hereby made a part of the Proposal, and an executed copy thereof shall accompany each Proposal submitted.

The undersigned, _____, of
lawful age, being first duly sworn states upon oath that he is _____

the Contractor submitting the attached proposal, that he knows of his own knowledge and states it to be a fact that neither said proposal nor the computation upon which it is based include any amount of monies, estimate or allowance representing wages, moneys or expenses, however designated, proposed to be paid to persons who are not required to furnish material or actually perform services upon or as a part of the proposed project.

AFFIANT

Subscribed and sworn to before me, a Notary Public, in and for the County and State aforesaid, this _____ day of _____, 20_____.

Notary Public

My commission expires _____